
Installation manual


Fit for 45mm bell bearing slide & Soft closing bell bearing slide Fit for two-layer baskets / three-layer baskets




Cabinet	item size
150mm	110+460+655
200m	140+460+666
300m	240+460+555

300=	210.100.000	
Accessory	Photo	QTY
573.5°16 screw	O	14
M5°8 screw	•••	4
M5°12 screw	*	2
Lakape fluing plate	1	2
Frame		1


Drill 6 x Dia.2.5 holes on the side panel of Cabinet as below:




2 Install the frame to the cabinet, fix by 6 pcs screws.

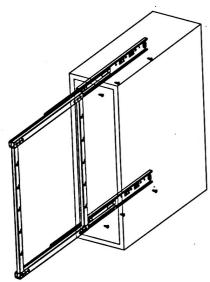


Drill 4 x Dia.2.5 holes one the door as below, fix the L shape fixing plate by screws.



Connect between the door and the frame, make adjustment for the door as below:




Install the basket to the frame.



Fitting Fascia Bracket to Frame 0 Note: Do this prior to Step VIIIIN 16-18 of cabinet assembly. Supplied with wirework 4 Note: Do this after Step 16-18 of cabinet assembly. Slide brackets into frame. For ease of viewing on this addendum fascia has been removed. 4 3

150 Pull Out Unit Wirework Guidance

1 Removing Frame from Runners

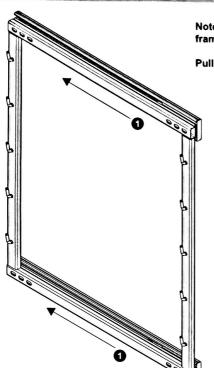

Note: Wirework may be supplied already placed on runners. For ease of fitting, remove frame with following guidance before constructing cabinet.

Pull frame out so runners are fully extended.



